




## Infinity Green: PL-24-XXXX-8M

### LED-Flexible Spotless Linear



#### Product Description

The Infinity Green Lighting Corporation LED Strip was designed with innovation in mind, offering unique features and functionality. This LED strip is energy-efficient, with a length of up to 8 Meters (26 ft) and customizable cutting options to suit your needs. It delivers top-tier performance in the market and requires only one driver and voltage regulator for efficient operation. For quick and easy installation, the strip comes with 3M double-sided tape, allowing it to adhere to most surfaces with minimal effort.

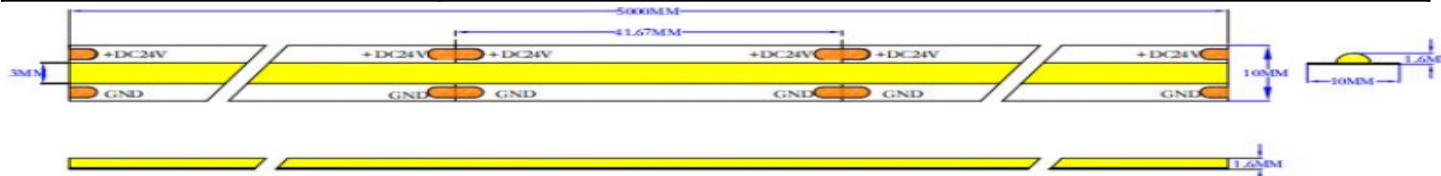

#### Specification Information

Length	26ft
Input Voltage	24v
Power Per Feet	3.5w
Size	Width:10mm Height:1.6mm
Cutting Increment	1.64Inch
Lumen Per Watt	90Lm/W
Colors	27k/30k/50k
CRI	90
Life Span	50,000H
Warranty	2 Years
IP Rate	IP 20

#### Features



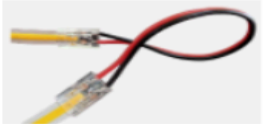





- Decent Display Light Source
- Under-SHELF & Under Cabinet
- User and Installation Friendly
- Long DIstance Strip Run
- Low Profile/Great Flexibilities
- 3M Installation Stick Tapes
- Various Dimmable Option
- Channel Options
- Adjustable Cutting

## Order Steps

### Product Purchasing Guideline

	MODEL NUMBER	-	COLOR TEMPERATURE	-	CRI	-	Meter
Ex:	PL-24		3090		90		8M
	PL-24		27K-2790K 30K-3000K 50K-5000K		90		8M

### Connection Accessories


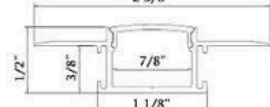

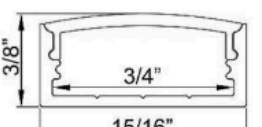

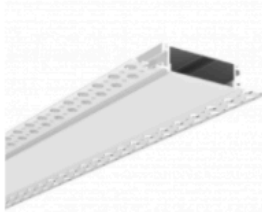

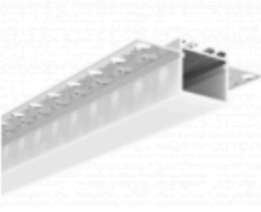


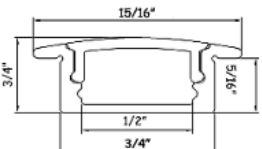
	<b>PL-24-DC Direct Connectors</b>		<b>PL-TCON T Connector</b>
	<b>PL-24-CC6 6" Jumper Connectors</b>		<b>PL-XCON X Connector</b>
	<b>PL-24-PC-HW 6" Hard-Wire Direct Connectors</b>		<b>PL-LCON L Connector</b>
	<b>PL-SG-C1 11 Keys Single Color Mini</b>		<b>PL-COB L CON COB L Connector</b>



## Infinity Green: PL-24-XXXX-8M

### LED-Flexible Spotless Linear

One of the most common ways to install LED strip light is with an LED channel. In addition to protecting and concealing your LED strip, it provides a polished and professional look for your lighting installation. We offer channels that can be surface mounted, hung, clip mounted, recessed, magnetically adhered and stair mounted. Channel systems consist of two main parts: aluminum channel and a diffuser or lens. We offer a number of standard designs, as well as some specialized extrusions for specific applications. (More Detail: [www.infigreen.com/channel-led/](http://www.infigreen.com/channel-led/))



Aluminum Channel (Accessories)			
	<p>ALP6002 - Slim Aluminum LED Profile For Surface Mounted</p> 		<p>ALP6081R Aluminum profile with PC opal cover</p> 
	<p>ALP6013 Aluminum LED Profile For Recessed</p> 		<p>ALP6071 Aluminum LED Profile Trimless Recessed</p> 
	<p>ALP6014 Aluminum LED Profile For Surface Mounted</p> 		<p>ALP6110R Trimless Recessed LED Aluminum Profile Channel</p> 
	<p>ALP6083R Aluminum Profile with PC opal cover</p> 		<p>ALP6110S Aluminum LED Profile with linch Square Lens</p> 
	<p>ALP6006 Aluminum Profile For Corner Mounted</p> 		<p>ALP6001R Aluminum LED Profile for Recess Mounted</p> 




Infinity Green: PL-24-XXXX-8M

LED-Flexible Spotless Linear

### Installation Steps

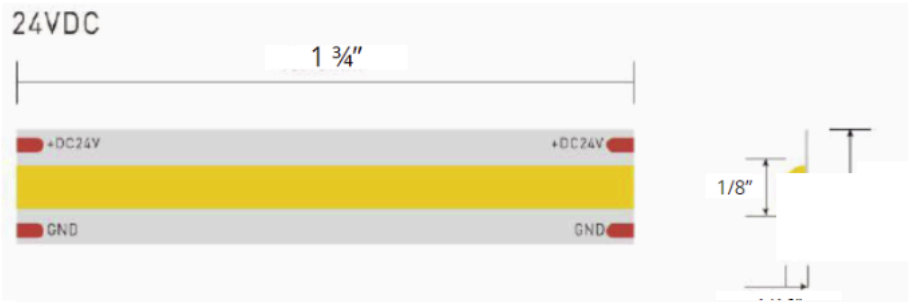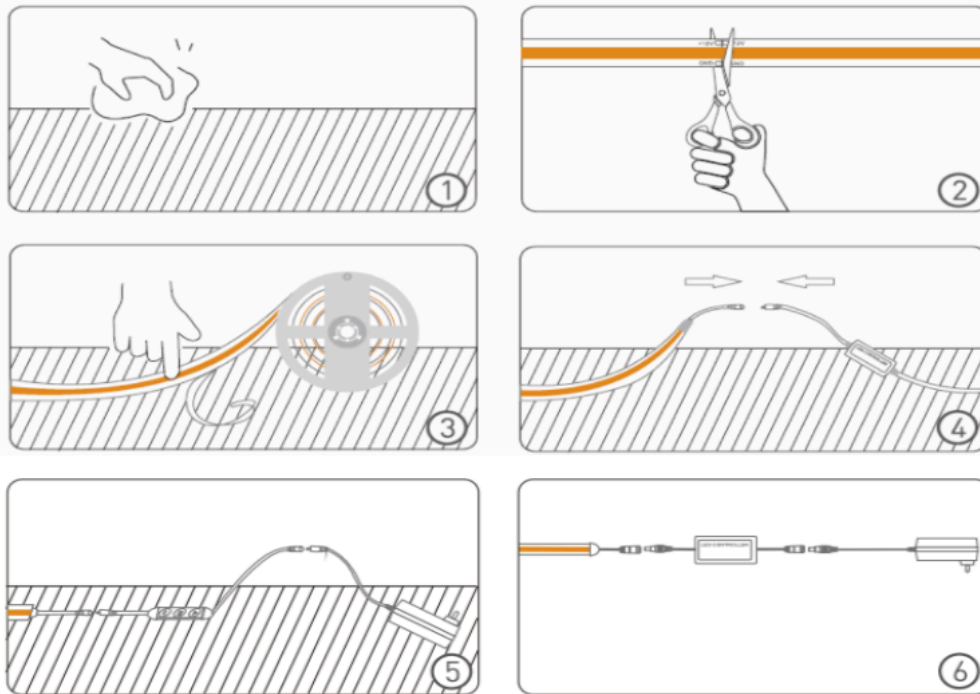

### Wiring

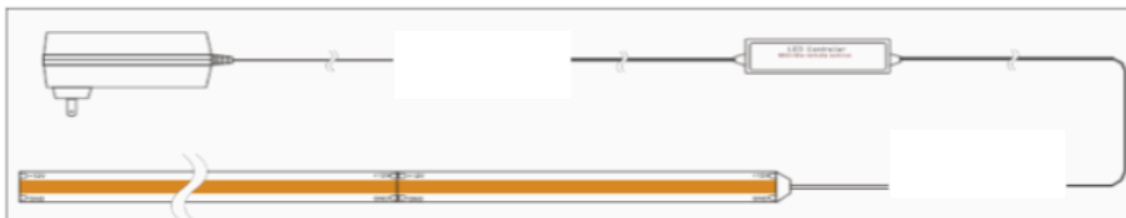



## **Safety Instructions**

1. Open the package and check if all the components are complete, then unrolling the led strip, and connect the COBstrip to controller and driver and light it up to check if all parts are in good condition or not. The connect method should refer to the wiring diagram.
2. Clean the surface on the installation surface, make sure it's clean, dry and smooth, Or it will reduce the adhesiveness of the back tape. Remember the back tape could be only used one time. The COB strip will fall off if the surface is not in good condition or the back tape is reused.
3. Measure the length required on the surface and cut the COB strip accordingly.
4. Tear off the back tape and paste the strip to the surface smoothly and correctly. Connect the COB strip to the controller and driver based on the diagram.
5. Fix the driver, make sure all the components are tightly and not fall off.

## **Warning**

1. Do not use it outdoors or underwater.
2. Disconnect the power before installation.
3. The operating temperature for the installation surface should be less than 40°C.
4. Do not use the products close to flammable materials.
5. The 91W only for 26FT(8M) COB strip, do not afford to Another COB strip or it would be overloaded.
6. Do not power the COB strip while it's rolled, or it will overheat and damage.
7. Do not power the COB strip by another power source, like 120VAC or 120VDC, the electronic components will be damaged.
8. Keep the components from children.

## **Customer Service**

In order to ensure the product's highest quality and our service. Please contact us at (sales@infigreen.com) for any concerns or questions regarding our product. We will reply within 24-48 Hours during our regular office hours Monday to Friday excluding weekends and holidaysThank You For The Interest In Our Product!